


# DIAPHRAGM PUMP

Model NDP-32BAN

*New*

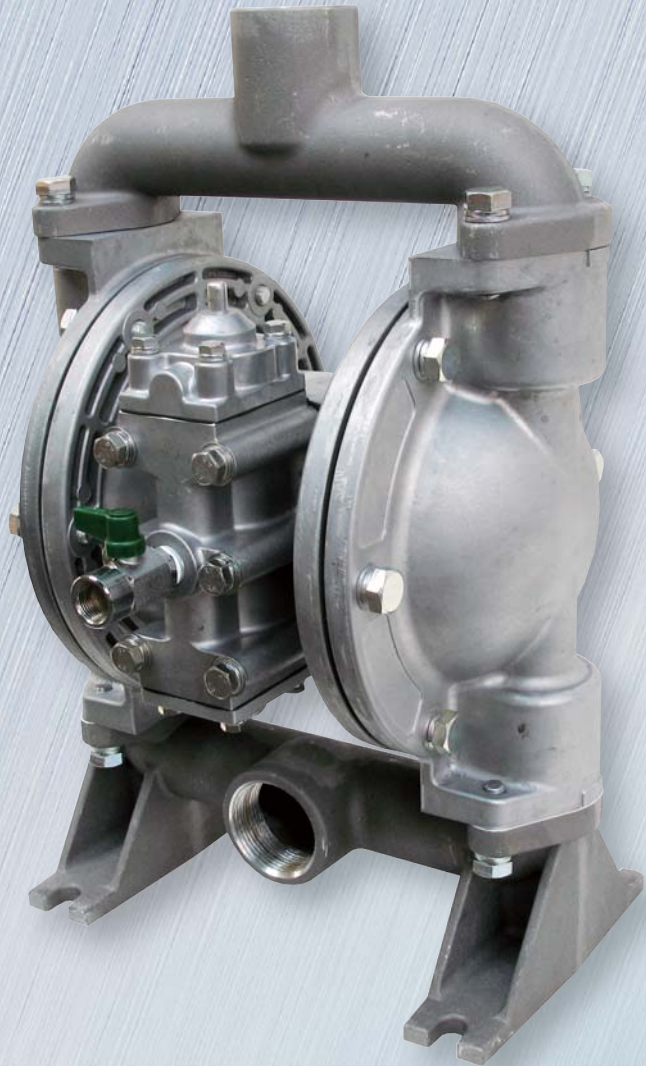


Inlet 40A/Outlet 32A

Upward discharge port  
and Horizontal inlet port

Easy to connect to  
upward discharge pipe

Explosion proof, Self priming  
and No mechanical seals

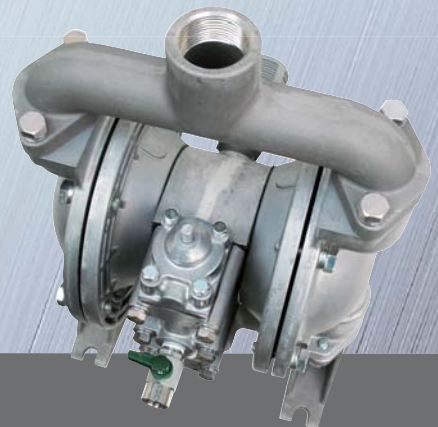


# Model NDP-32BAN




## Specifications

Model	NDP-32BAN	
Connection to liquid	Inlet	NPT 1 - 1/2(F)
	Outlet	NPT 1 - 1/4(F)
Air connection	Inlet	NPT 3/8
	Outlet	NPT 3/4
Air supply pressure range	0.2~0.7MPa	
Max discharge pressure	0.7 MPa	
Discharge volume/cycle	670 mL	
Max discharge volume	190 L/min	
Max air consumption	2000 L/min (ANR)	
Limit of slurry	Less than 3mm	
Limit of viscosity	Negative suction:Less than 3Pa·s Positive suction:Less than 8Pa·s	
Temp range	Ambient	0~70°C
	Liquid	0~70°C
Noise level	81dB	
Weight	12.0 kg	

## Performance curve

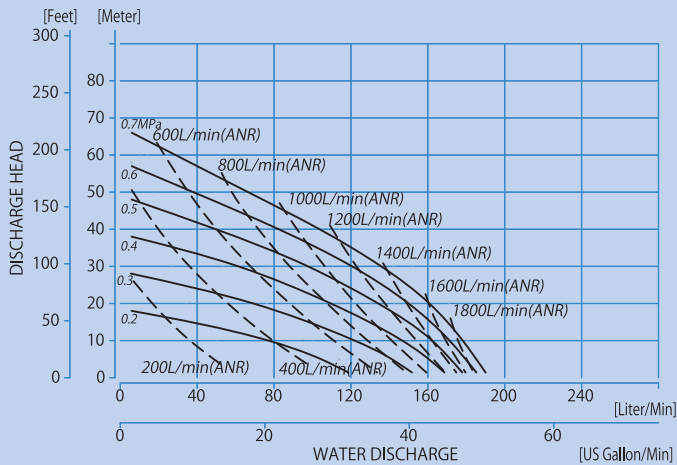

## Dimensions

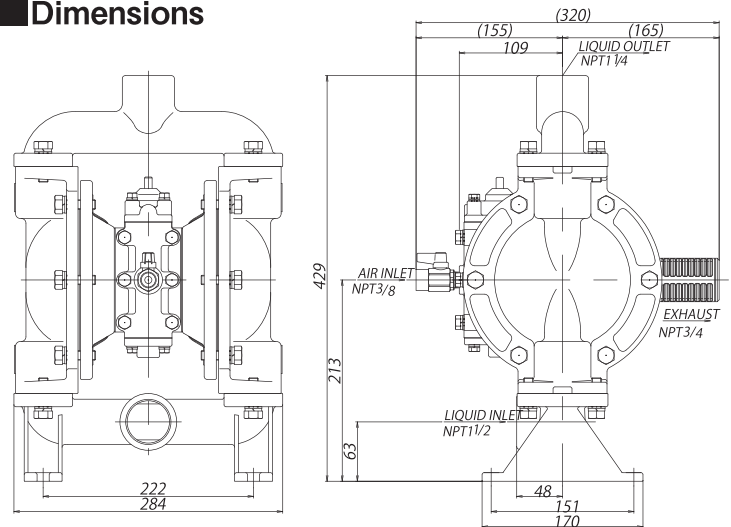

**Caution:** When selecting products from this catalogue please make sure that you choose the correct version suited to your application and conditions.

## YAMADA CORPORATION

### International Department

No.1-3,1-chome, Minami-magome Ohta-ku, Tokyo 143-8504 Japan  
Tel +81-(0) 3-3777-0241 Fax +81(0) 3-3777-0584

URL : <http://www.yamadacorp.co.jp/global>

mail : [intl@yamadacorp.co.jp](mailto:intl@yamadacorp.co.jp)

\* The specifications contained herein may be changed at any time without warning.